



SOLAR LED STREET LIGHT

Two lens options

Rocket

Shark



IP66 WATERPROOF

IP66-rated waterproofing allows the street light to withstand all weather

**FULL BODY WATERPROOF
NOT AFRAID OF
RAINSTORM WEATHER**



Installation Height 9-13M

Height: 9-13m

Illumination area: 900-1300 square meters


Shark




Rocket



Product Details

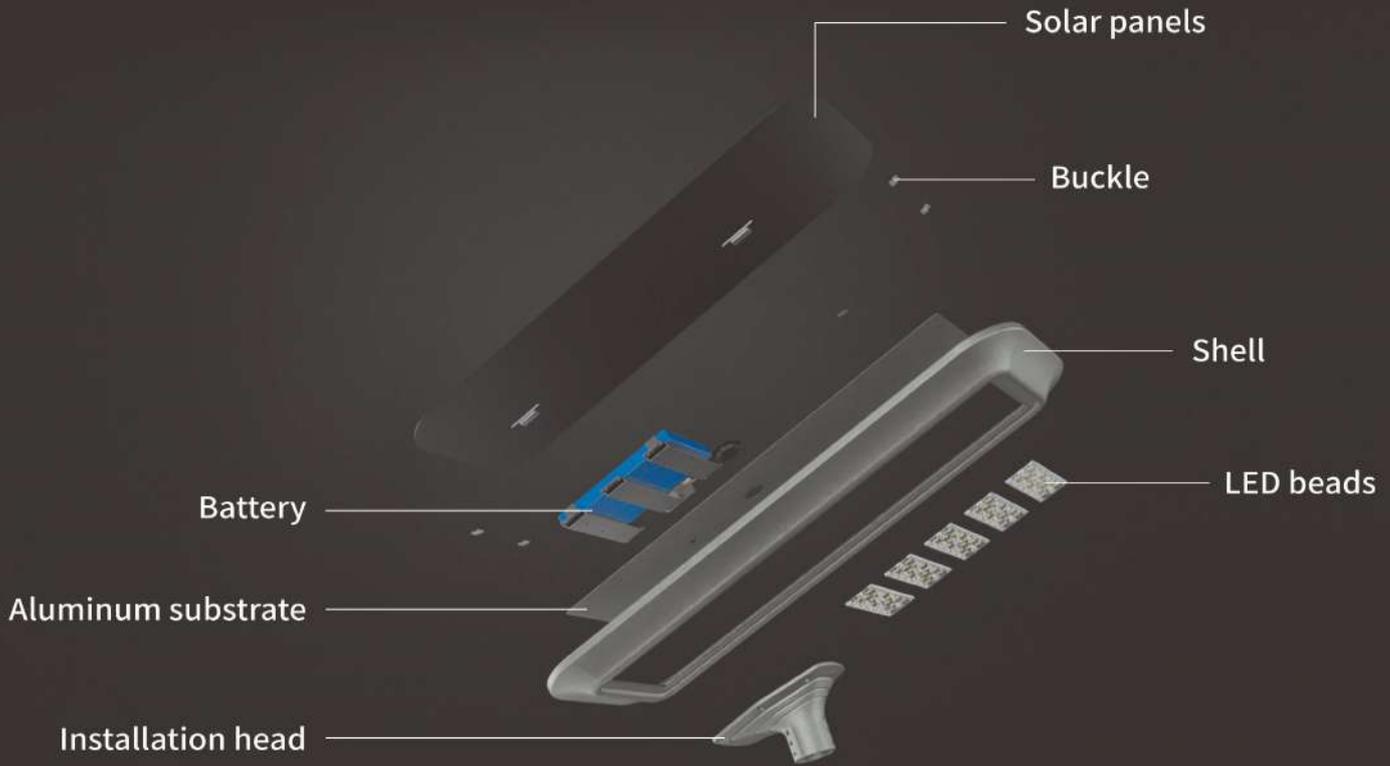


FEATURE: SOLAR PANEL EASY OPEN AND EASY MAINTENANCE

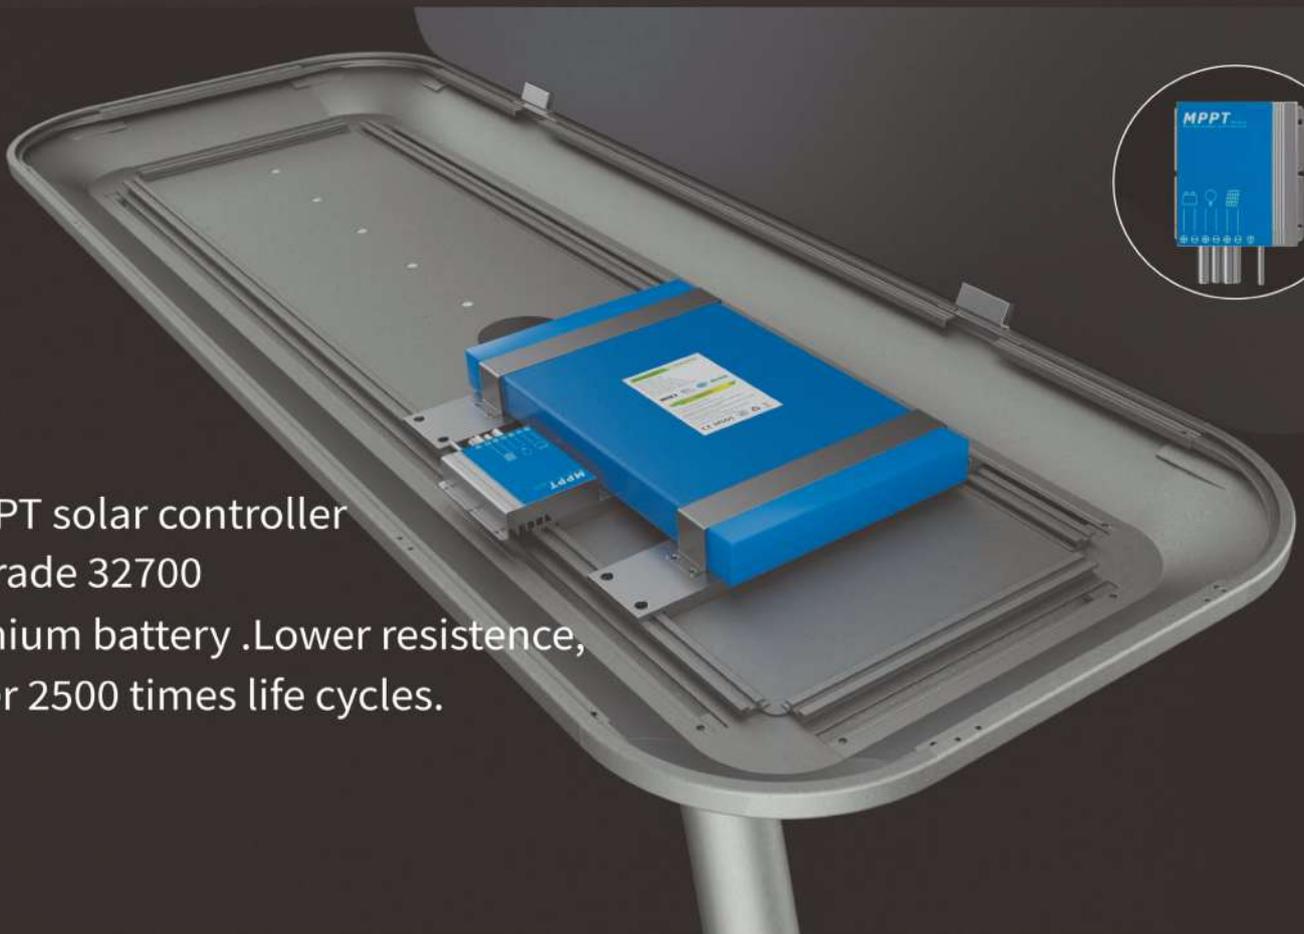

MPPT solar controller
A grade 32700
Lithium battery .Lower resistance,
over 2500 times life cycles.

Monocrystalline Solar Panel

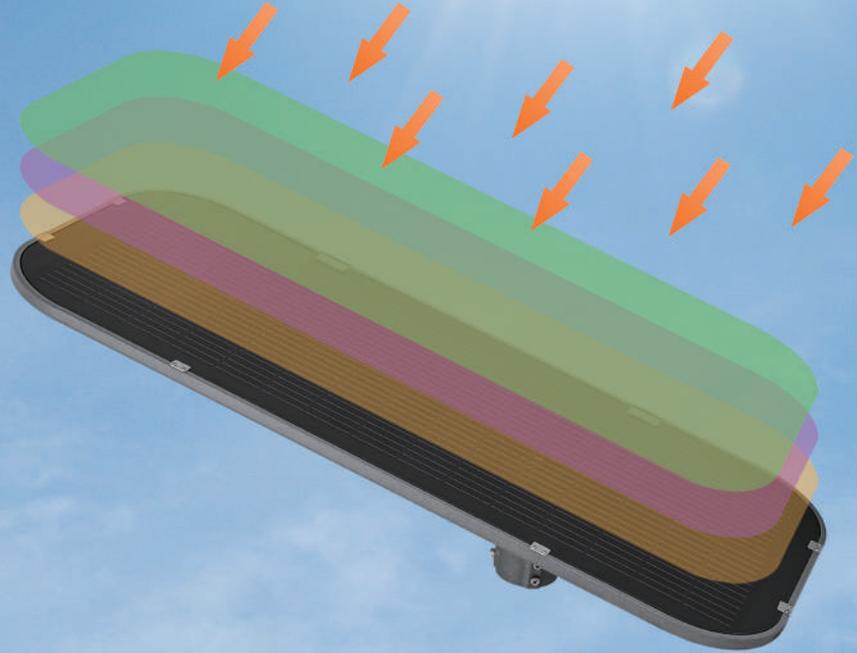

Use waterproof IP66 fission solar controller, charging efficiency is as high as 75%,

Equipped with waterproof IP66 silica gel lamp tape, strong and durable



Solar energy



Long battery life



Adjustable brightness



Time off



Intelligent control



CHARGING DURING


THE DAY 10-12Hr



WORKING

AT NIGHT 24-30Hr

Product Parameters

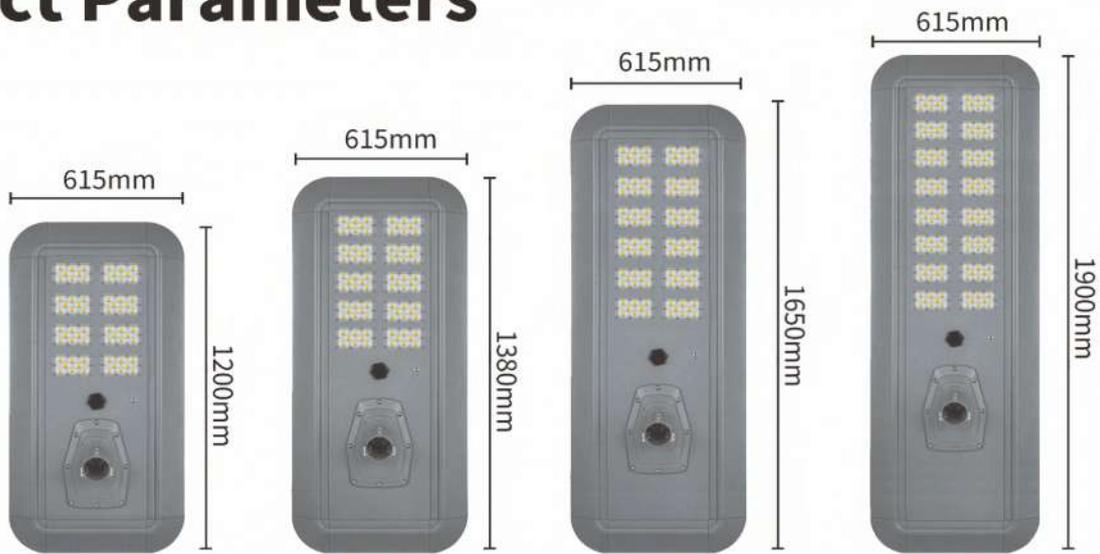

MODEL	Solar Panel	Battery	Lumen Efficiency	Product Size	Warranty
SHO-SK-125W	18V/125W	12.8V/42AH	215lm/w	1200*615*250mm	3 Years
SHO-SK-150W	18V/150W	12.8V/48AH	215lm/w	1380*615*250mm	3 Years
SHO-SK-180W	36V/180W	25.6V/30AH	215lm/w	1650*615*250mm	3 Years
SHO-SK-210W	36V/210W	25.6V/36AH	215lm/w	1900*615*250mm	3 Years



MODEL	Solar Panel	Battery	Lumen Efficiency	Product Size	Warranty
SHO-RC-85W	18V/85W	12.8V/30AH	215lm/w	990*520*250mm	3 Years
SHO-RC-105W	18V/105W	12.8V/36AH	215lm/w	1200*520*250mm	3 Years
SHO-RC-125W	18V/125W	12.8V/42AH	215lm/w	1380*520*250mm	3 Years
SHO-RC-150W	18V/150W	12.8V/48AH	215lm/w	1650*520*250mm	3 Years

INTELLIGENT CONTROL SYSTEM

100% use of solar energy, no consumption of fossil fuels, no air pollution working mode

PS: The intelligent system will prioritize according to the settings



OFF TIME



Working Time 1

Time range: 0-15h
Default time: 4 hours
Power range: 0-100%
Default brightness: 100%

Working Time 2

Time range: 0-15h
Default time: 4 hours
Power range: 0-100%
Default brightness: 70%

Working Time 3

Time range: 0-15h
Default time: 4 hours
Power range: 0-100%
Default brightness: 50%

Dawn time

Time range: 0-15h
Default time: 0h
Power range: 0-100%
Default brightness: 30%

Morning lighting mode:
The sensor of light controller lights up the light before sunrise.

Common working methods:

Working hours can be divided into three time periods. Each working time can be adjusted to 0-15 hours, and the power can be adjusted 0% -100%.

Intelligent power regulation

The intelligent battery control system can automatically adjust the output power of the lighting fixtures based on the battery storage capacity, effectively extending the working time of the lighting fixtures. Even in continuous cloudy and rainy weather, it can ensure the continuous operation of solar street lights.

ROCKET INSTALL HEIGHT



SHARK INSTALL HEIGHT



THE FACTORY SHOW



NEW BATTERY LITHIUM IRON PHOSPHATE BATTERIES



SHOMO'O DUBAI TRADING CO.,LTD


📍 Address: 8136 MOHAMED BIN DRAID AL-SULAI, 4651, P.O.BOX:034531, RIYADH 11381. SAUDI ARABIA.

☎ Tel: 0096-653-6943228


✉ Email: info@shomoa-dubai.com

🌐 Website: www.shomoa-dubai.com

SOLAR LED STREET LIGHT

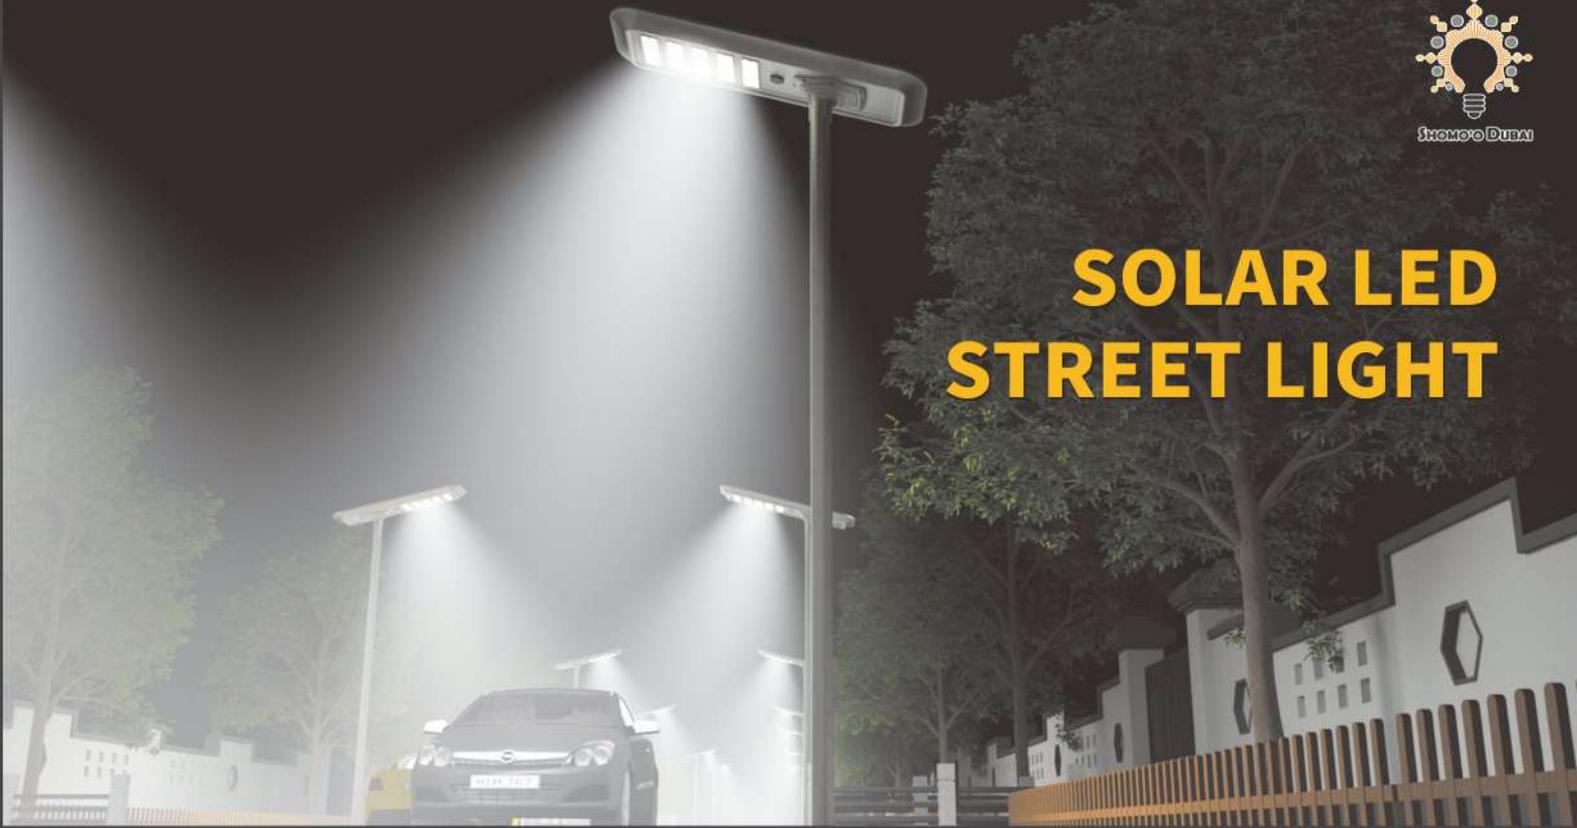

Model: ROCKET

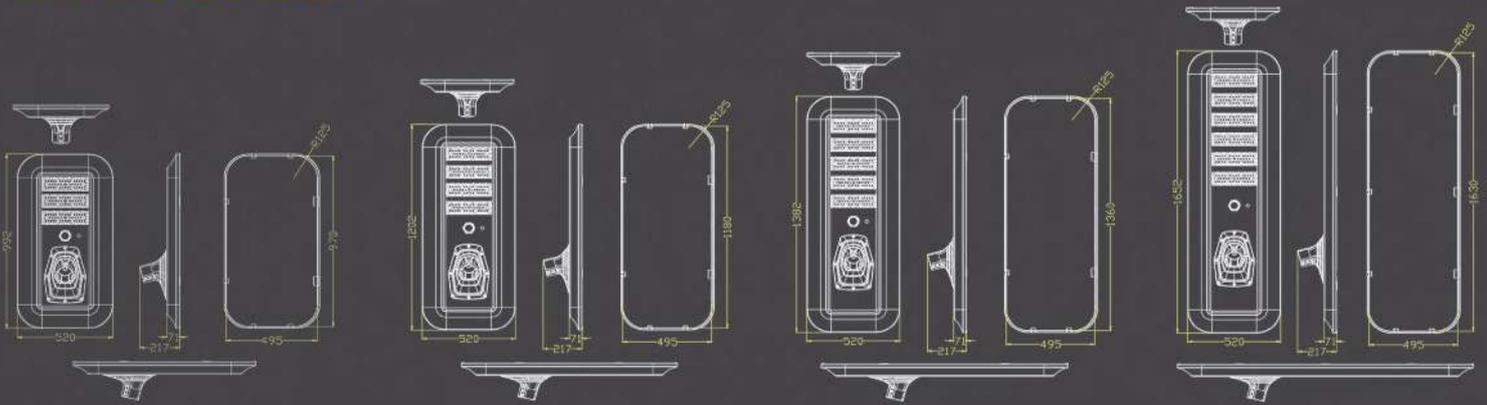

Model: SHARK

